



ROV Shackles

For Highest Safety and Functionality


ROV Retrieve Shackle

NEW

The Gunnebo Industries ROV Retrieve Shackle is designed for smooth and easy use in retrieving and releasing subsea lifting and rigging operations. It has no loose parts, in closed or opened position, and there is therefore no need for wires or monkey fists that will risk snagging or getting in the way.

The high visibility handles are close-die forged and has double safety functions - shark tooth locking with indicator that will show if the shackle is in open or locked position as well as the spring loaded handle. The handle is the same size, regardless of size of shackle.


The Gunnebo Industries ROV Retrieve Shackle no. 861 is an easy to operate shackle, saving valuable time and money.

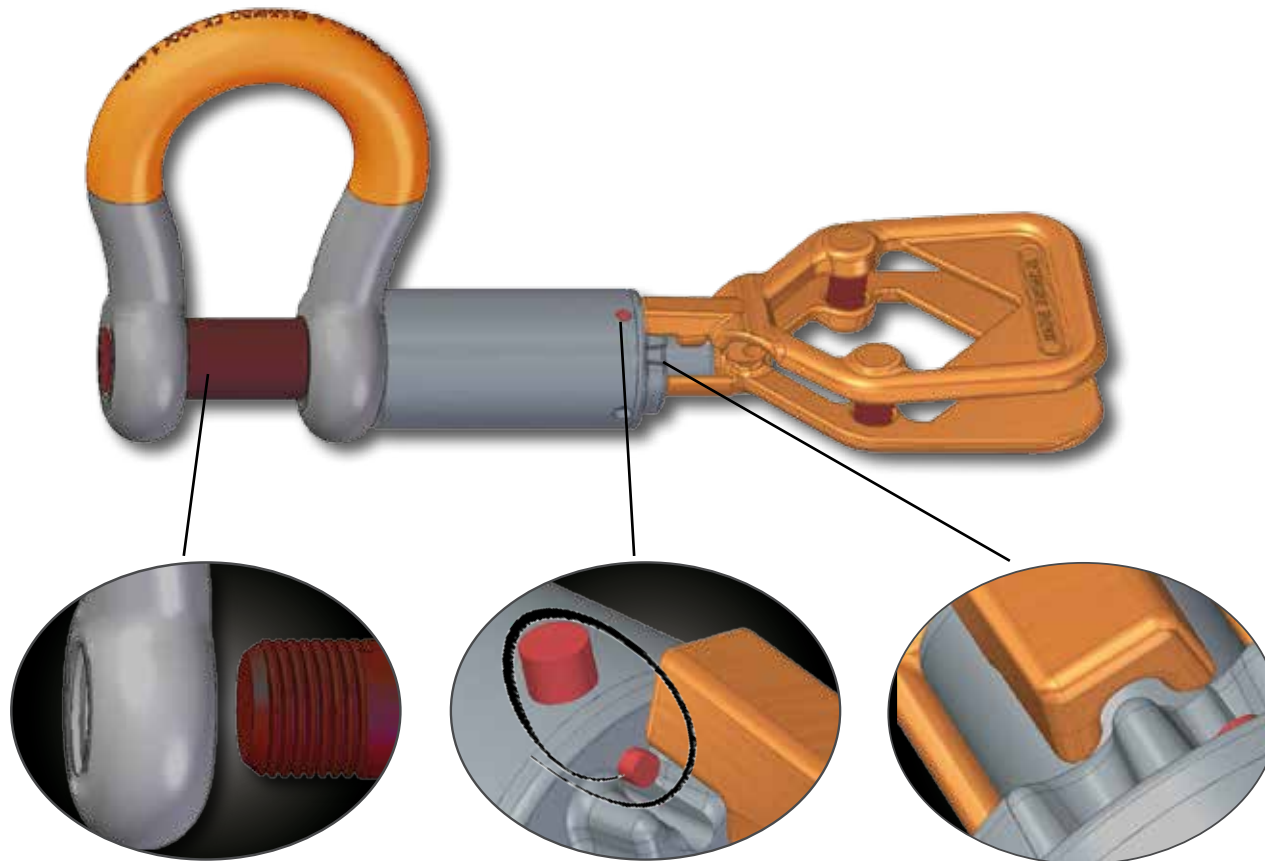

Tapered bolt end for easy attachment

Indicator for open and closed position

"Shark tooth" locking


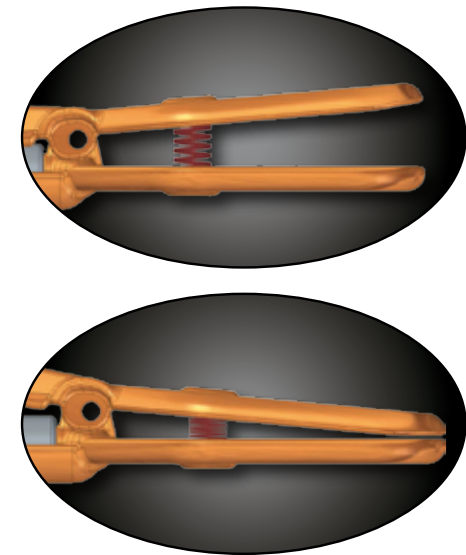


The V-designed handle gives better grip for the ROV unit and can only be turned when the handle is pressed down

ROV Retrieve Shackle no 861

All shackles have unique marking

- Standard: Dim. according to EN 13889
- Material: High Tensile Steel, Quenched and Tempered
- Finish: All load bearing parts hot dip galvanized
- Safety factor: 6:1
- Documentation: Test certificate and material traceability 3.1 certificate can be supplied on request
- Impact values: Min. 42 Joule at -40 °C
- In-service Temperature: -40 °C to 200 °C

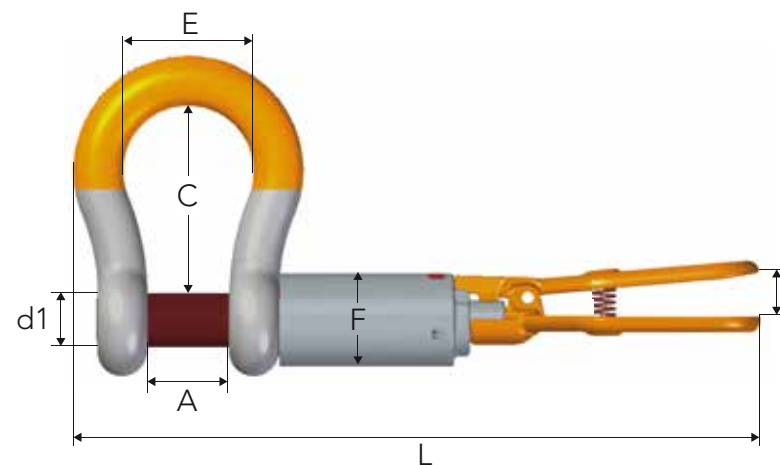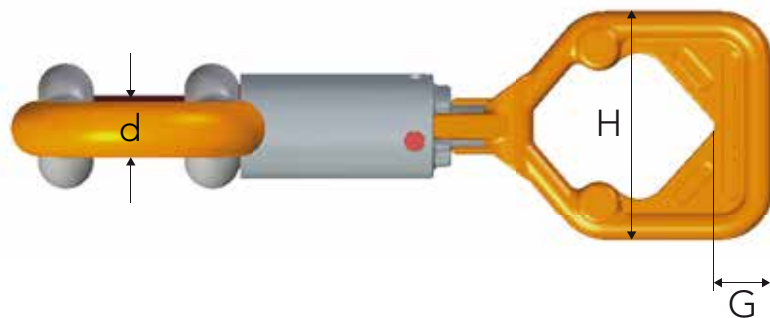

Art. no	WLL (tonnes)	d1	d	A	C	E	F	L	I	H	G	Weight (kg)
A086128	9.5	32	28	47	108	74	60	418	31	132	33	6.0
A086132	12	35	32	52	119	83	60	460	31	132	33	8.0
A086138	17	42	38	60	146	98	63.5	501	31	132	33	10.5
A086145	25	50	45	74	178	127	70	565	31	132	33	16.5
A086152	35	57	50	83	197	138	76	604	31	132	33	20.5
A086164	55	70	65	105	255	185	88	712	31	132	33	42.0

ROV Release Shackles

ROV Release Shackle no. 863 Equipped with bolt and two locking pins

All shackles have unique marking

Standard: Dim. according to EN 13889

Material: High Tensile Steel,
Quenched and Tempered


Finish: All load bearing parts
hot dip galvanized

Safety factor: 5:1

Documentation: Test certificate and material
traceability 3.1 certificate can be
supplied on request

Impact values: Min. 42 Joule at -40 °C

In-service Temperature: -40 °C to 200 °C

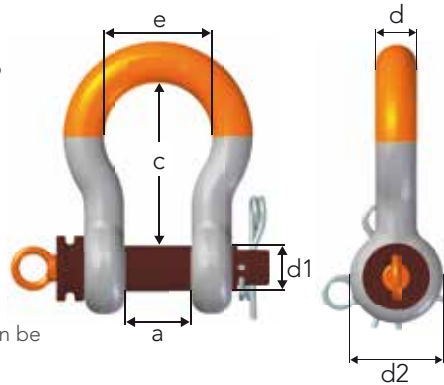

Art. no.	WLL (tonnes)	d1	d	a	c	d2	e	Weight (kg)
A086322	6.5	25	22	37	84	52	58	1.6
A086328	9.5	32	28	46	108	64	74	4.0
A086332	12	35	32	52	119	72	83	5.0
A086338	17	42	38	60	146	84	98	7.8
A086345	25	50	45	74	178	105	127	13.9
A086352	35	57	50	83	197	127	138	20.0
A086364	55	70	65	105	255	152	185	41.0

ROV Release Shackle no 860 Threaded bolt with one locking pin

Standard: Dim. according to EN 13889

Material: High Tensile Steel,
Quenched and Tempered


Finish: All load bearing parts
hot dip galvanized

Safety factor: 6:1

Documentation: Test certificate and material
traceability 3.1 certificate can be
supplied on request

Impact values: Min. 42 Joule at -40 °C

In-service Temperature: -40 °C to 200 °C

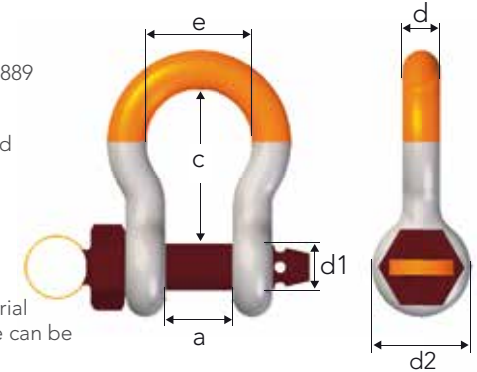

Art. no.	WLL (tonnes)	d1	d	a	c	d2	e	Weight (kg)
A086028	9.5	32	28	46	108	64	74	4.0
A086032	12	35	32	52	119	72	83	5.0
A086038	17	42	38	60	146	84	98	7.8
A086045	25	50	45	74	178	105	127	13.9
A086052	35	57	50	83	197	127	138	20.0
A086064	55	70	65	105	255	152	185	41.0



gunneboindustries.com

March 2017

©All rights in this publication reserved by Gunnebo Industrier AB